


Pumptrack PC6




Pumptrack PC6

Safety area

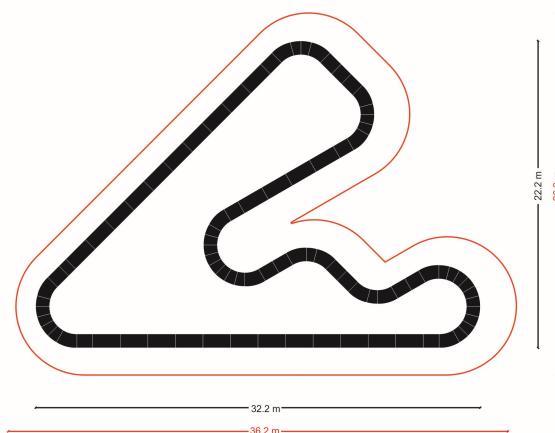

Rideable Surface length: 108 m
Safety area: 26,2m x 36,2m

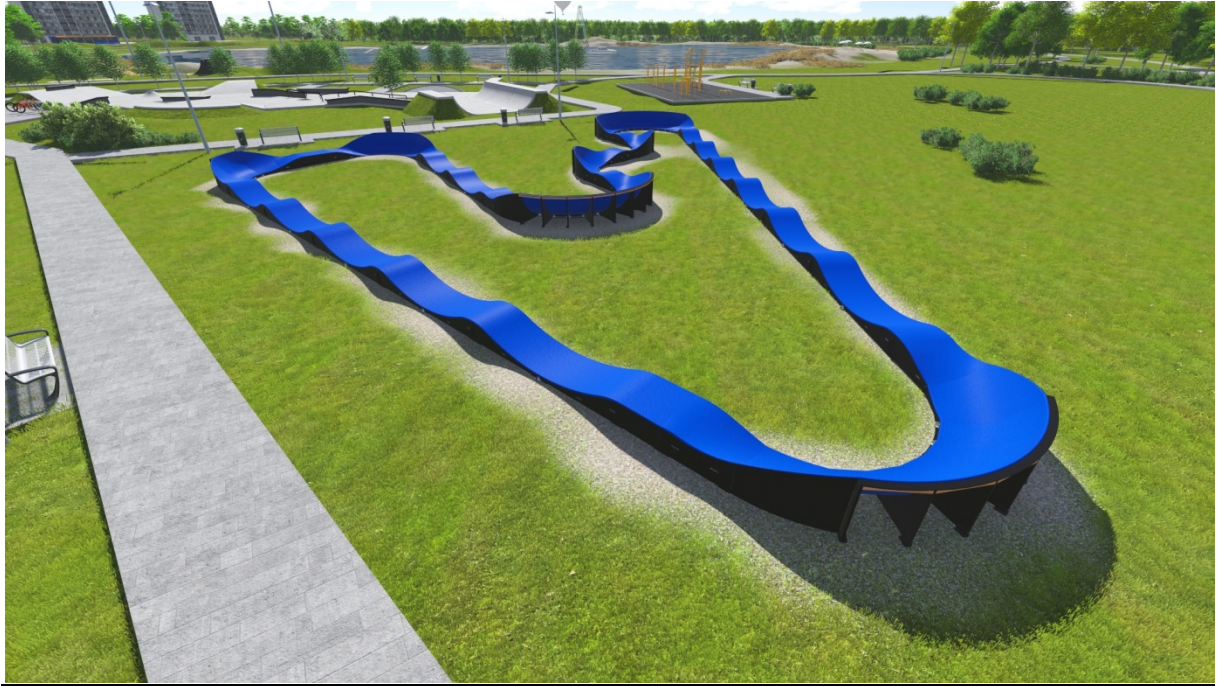

Bicycle playground – pumptrack

Pumptrack it is track entirely made of modular elements. This type of object can be a form of self-contained activity or co-creates a sports complex. Pumptrack consists of moguls, turning and small profiled "jumps" arranged in this order to allow the spin up and maintain speed without pedalling. The concern to maintain the high level of security, facility allows to familiarity with the bike, develops coordination and improves the sense of balance.

1. Technical description of the project to build a bike playground - PUMPTRACK PC6.

Composite Pumptrack PC6 is the extended version of PC3. There is combination of fast corners and a large number of pumps to dispel. It causes that track becomes faster and more interesting for the user. Our offer of Pumptrack PC6 will satisfy beginners and people familiar with the sport discipline. Composite Pumptrack is installed on a flat asphalt, concrete or previously prepared, paved square. Composite Pumptrack can benefit cyclists, rollerblades, windsurfer and commuters on scooters.

1.1. Determination of the material scope of works

Scope of work

- Alignment and levelling of land designated for Pumptrack (declines cannot exceed 3%).

Levelling of land is not necessary if on the place where installation is planned **there is asphalt surface, concrete or levelled layer of aggregate.**

- Supply and installation of bicycle playground - PUMPTRACK.









Producer: Techramps 31-990 Krakow , Organki 2,- www.pumptrack.eu

1.2. Specification of bike playground - PUMPTRACK

Requirements for components:

- Minimum height of turning modules is 95 cm,
- Minimum height of hump modules is 49 cm,
- Minimum width of the running layer of is 1 m,
- The components are based on the design of plywood, double laminated with a thickness of 18 mm and impregnated with larch wood,
- Each module of turning is comprised 15 ° of Right Angle
- The modules should be connected together using bolts 10/60 mm,
- elements of cycling are made of composite (fiberglass, synthetic resin) with anti-skidding layer TechGrip.
- In the upper surface of the layer of cycling cannot be located elements directly linked to the elements of structure.
- Inner composition of screw of the modules of turning must be strengthened with steel flat bar. Minimum thickness of steel flat bar is 4 mm,
- The modules must be isolated from the ground using stands with plywood.
- All elements of the track must have got handles which help lifting them and manipulation easy,
- All the components of the track must be paired together with a tolerance of 3 mm.
- The contractor provides minimum 2-year of guarantee on the structure of equipment and 5-year of guarantee on the chassis element. Guarantee does not cover mechanical damage,
- All used screws - Torx, hot-dip galvanized,
- All the used steel elements must be hot-dip galvanized,
- Bicycle playground must have possibility to expand with new elements,
- Track bike must be in line with PN-EN 14974 + A1: 2010,
- It is allowed to change the configuration of the track arrangement

1.3. List of elements

NAME OF MODULE	VIEW	DIMENSIONS [cm]	QUANTITY
P1		200x100x49	26
Z1L		125x100x58	7
Z1P		125x100x58	7
Z2P		147x120x97	7
Z2L		147x120x97	7
B		83x120x97	30
S4		81x100x49	1
S6		106x100x49	1

EXAMPLE OF MODULAR PUMPTRACK



OTHER FACILITIES

Do you have a question about another subject, please contact us by e-mail or phone.

